
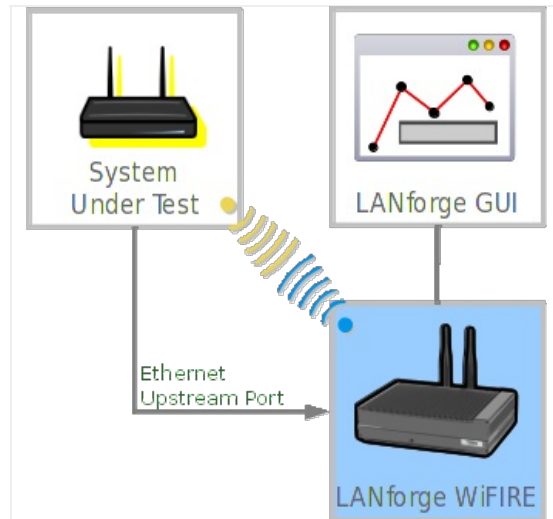


Test WiFi station upload throughput.

Goal: Test WiFi station upload throughput with various numbers of stations.

Test WiFi station upload throughput with various numbers of stations. This example uses a pair of LANforge CT520 systems, but the procedure should work on all CT521, CT522, CT523, CT525 and similar systems. Encrypted throughput (WPA2) will perform better on the CT523 and higher systems because their CPUs are more powerful. This test assumes you have already created a virtual AP on system 1 and configured it to act as a router and give out DHCP.

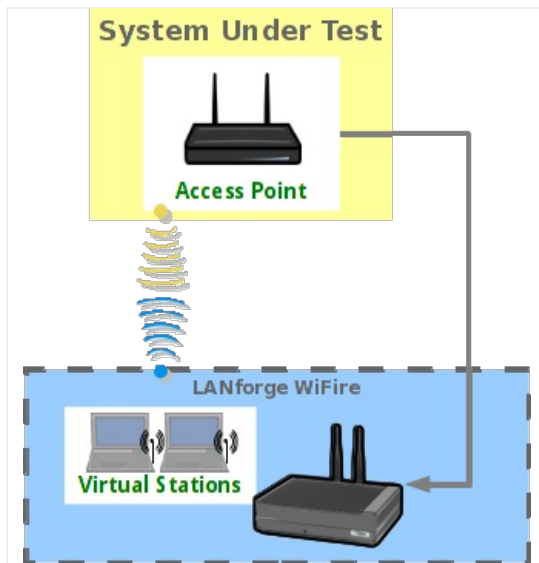

1. Test TCP upload throughput with one station (Open)

- A. Go to the Port Manager, select the **wlan0** interface on the second system, and click **Modify**. Set the SSID to match the VAP on system 1.

wlan0 (brent-521) Configure Settings

Port Status Information
Current: LINK-DOWN GRO NONE
Driver Info: Port Type: WIFI-STA Parent: wiphy0

Port Configurables

Standard Configuration | Advanced Configuration | Misc Configuration | Custom WiFi

Enable

- Set IF Down
- Set MAC
- Set TX Q Len
- Set MTU
- Set Offload
- Set PROMISC

Services

- HTTP
- FTP
- RADIUS

Low Level

- PROMISC
- TSO Enabled
- UFO Enabled
- GSO Enabled
- LRO Enabled
- GRO Enabled

General Interface Settings

- Down Aux-Mgt
- DHCP-IPv6 DHCP Release DHCP Vendor ID: None
- DHCP-IPv4 DHCP Client ID: None
- DNS Servers: 10.97.1.1 Peer IP: NA
- IP Address: 0.0.0.0 Global IPv6: AUTO
- IP Mask: 0.0.0.0 Link IPv6: AUTO
- Gateway IP: 0.0.0.0 IPv6 GW: AUTO
- Alias: MTU: 1500
- MAC Addr: 00:0e:8e:3d:30:f8 TX Q Len: 1000
- Rpt Timer: faster (1 s) WiFi Bridge: NONE

WiFi Settings

- SSID: ben-138 AP: DEFAULT
- Key/Phrase: Mode: 8 (8)
- Freq/Channel: 5180/36 Rate: OS Default
- WPA WPA2 OSEN WEP Disable HT40 Disable SGI


Print View Details Probe Display Scan Sync Apply OK Cancel

- B. Go to Layer-3 tab and click **Create** to build a TCP connection. Select the Protocol, ports, rates, PDU sizes, Send & Receive buffer sizes.

tcp-se - Create/Modify Cross Connect

<p>1 Cross-Connect</p> <p>CX Name: tcp-se</p> <p>CX Type: LANforge / TCP</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td>1 (ec2010-ath9k-1)</td> <td>3 (t520-6157)</td> </tr> <tr> <td>Port: 15 (vap0)</td> <td>4 (vlan0)</td> </tr> <tr> <td>Min Tx Rate: Zero (0 bps)</td> <td>0C12 (622.08 Mbps)</td> </tr> <tr> <td>Max Tx Rate: Same</td> <td>Same</td> </tr> <tr> <td>Min PDU Size: UDP Pld (1,472 B)</td> <td>65535 (65,535 B)</td> </tr> <tr> <td>Max PDU Size: Same</td> <td>Same</td> </tr> <tr> <td>IP ToS: Best Effort (0)</td> <td>Best Effort (0)</td> </tr> <tr> <td>Pkts To Send: Infinite</td> <td>Infinite</td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	1 (ec2010-ath9k-1)	3 (t520-6157)	Port: 15 (vap0)	4 (vlan0)	Min Tx Rate: Zero (0 bps)	0C12 (622.08 Mbps)	Max Tx Rate: Same	Same	Min PDU Size: UDP Pld (1,472 B)	65535 (65,535 B)	Max PDU Size: Same	Same	IP ToS: Best Effort (0)	Best Effort (0)	Pkts To Send: Infinite	Infinite	<p>2 Cross-Connect</p> <p>Report Timer: fast (1 s)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td>Increasing</td> <td>Increasing</td> </tr> <tr> <td>Min IP Port: AUTO</td> <td>AUTO</td> </tr> <tr> <td>Max IP Port: Same</td> <td>Same</td> </tr> <tr> <td>Min Duration: Forever</td> <td>Forever</td> </tr> <tr> <td>Max Duration: Same</td> <td>Same</td> </tr> <tr> <td>Min Reconn: 0 (0 ms)</td> <td>0 (0 ms)</td> </tr> <tr> <td>Max Reconn: Same</td> <td>Same</td> </tr> <tr> <td>Multi-Conn: Normal (0)</td> <td>Normal (0)</td> </tr> <tr> <td style="text-align: center;"><input type="button" value="Script"/></td> <td style="text-align: center;"><input type="button" value="Script"/></td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	Increasing	Increasing	Min IP Port: AUTO	AUTO	Max IP Port: Same	Same	Min Duration: Forever	Forever	Max Duration: Same	Same	Min Reconn: 0 (0 ms)	0 (0 ms)	Max Reconn: Same	Same	Multi-Conn: Normal (0)	Normal (0)	<input type="button" value="Script"/>	<input type="button" value="Script"/>
TX Endpoint	RX Endpoint																																						
1 (ec2010-ath9k-1)	3 (t520-6157)																																						
Port: 15 (vap0)	4 (vlan0)																																						
Min Tx Rate: Zero (0 bps)	0C12 (622.08 Mbps)																																						
Max Tx Rate: Same	Same																																						
Min PDU Size: UDP Pld (1,472 B)	65535 (65,535 B)																																						
Max PDU Size: Same	Same																																						
IP ToS: Best Effort (0)	Best Effort (0)																																						
Pkts To Send: Infinite	Infinite																																						
TX Endpoint	RX Endpoint																																						
Increasing	Increasing																																						
Min IP Port: AUTO	AUTO																																						
Max IP Port: Same	Same																																						
Min Duration: Forever	Forever																																						
Max Duration: Same	Same																																						
Min Reconn: 0 (0 ms)	0 (0 ms)																																						
Max Reconn: Same	Same																																						
Multi-Conn: Normal (0)	Normal (0)																																						
<input type="button" value="Script"/>	<input type="button" value="Script"/>																																						
<p>3 Cross-Connect</p> <p>Test Manager: default_tm</p> <p>Quiesce: 3</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td>AUTO</td> <td>AUTO</td> </tr> <tr> <td><input type="checkbox"/> Replay File</td> <td><input type="checkbox"/> Replay File</td> </tr> <tr> <td><input type="checkbox"/> Loop</td> <td><input type="checkbox"/> Loop</td> </tr> <tr> <td><input type="checkbox"/> Dest Mac</td> <td><input type="checkbox"/> Dest Mac</td> </tr> <tr> <td>Filename:</td> <td></td> </tr> <tr> <td>Dest MAC: 00 0e 8e 32 12 cf</td> <td>80 01 02 03 04 05</td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	AUTO	AUTO	<input type="checkbox"/> Replay File	<input type="checkbox"/> Replay File	<input type="checkbox"/> Loop	<input type="checkbox"/> Loop	<input type="checkbox"/> Dest Mac	<input type="checkbox"/> Dest Mac	Filename:		Dest MAC: 00 0e 8e 32 12 cf	80 01 02 03 04 05	<p>4 Cross-Connect</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td>Snd Buff Size: 2MB (2 MB)</td> <td>2MB (2 MB)</td> </tr> <tr> <td>Rcv Buff Size: 2MB (2 MB)</td> <td>2MB (2 MB)</td> </tr> <tr> <td>Send Bad FCS: zero (0%)</td> <td>zero (0%)</td> </tr> <tr> <td>Src MAC: 80:01:02:03:04:05</td> <td>00:0e:8e:32:12:cf</td> </tr> <tr> <td><input type="checkbox"/> Use-Proxy</td> <td><input type="checkbox"/> Use-Proxy</td> </tr> <tr> <td>Proxy Addr: 10.97.1.207</td> <td>10.97.1.1</td> </tr> <tr> <td>Proxy Port: 33003</td> <td>33003</td> </tr> <tr> <td>Socket Priority: 0</td> <td>0</td> </tr> <tr> <td style="text-align: center;"><input type="button" value="Payload"/></td> <td style="text-align: center;"><input type="button" value="Payload"/></td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	Snd Buff Size: 2MB (2 MB)	2MB (2 MB)	Rcv Buff Size: 2MB (2 MB)	2MB (2 MB)	Send Bad FCS: zero (0%)	zero (0%)	Src MAC: 80:01:02:03:04:05	00:0e:8e:32:12:cf	<input type="checkbox"/> Use-Proxy	<input type="checkbox"/> Use-Proxy	Proxy Addr: 10.97.1.207	10.97.1.1	Proxy Port: 33003	33003	Socket Priority: 0	0	<input type="button" value="Payload"/>	<input type="button" value="Payload"/>				
TX Endpoint	RX Endpoint																																						
AUTO	AUTO																																						
<input type="checkbox"/> Replay File	<input type="checkbox"/> Replay File																																						
<input type="checkbox"/> Loop	<input type="checkbox"/> Loop																																						
<input type="checkbox"/> Dest Mac	<input type="checkbox"/> Dest Mac																																						
Filename:																																							
Dest MAC: 00 0e 8e 32 12 cf	80 01 02 03 04 05																																						
TX Endpoint	RX Endpoint																																						
Snd Buff Size: 2MB (2 MB)	2MB (2 MB)																																						
Rcv Buff Size: 2MB (2 MB)	2MB (2 MB)																																						
Send Bad FCS: zero (0%)	zero (0%)																																						
Src MAC: 80:01:02:03:04:05	00:0e:8e:32:12:cf																																						
<input type="checkbox"/> Use-Proxy	<input type="checkbox"/> Use-Proxy																																						
Proxy Addr: 10.97.1.207	10.97.1.1																																						
Proxy Port: 33003	33003																																						
Socket Priority: 0	0																																						
<input type="button" value="Payload"/>	<input type="button" value="Payload"/>																																						
<p>5 Cross-Connect</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td>Delayed ACK Settings</td> <td>Delayed ACK Settings</td> </tr> <tr> <td>Min: DEFAULT</td> <td>DEFAULT</td> </tr> <tr> <td>Max: DEFAULT</td> <td>DEFAULT</td> </tr> <tr> <td>Max Segments: DEFAULT</td> <td>DEFAULT</td> </tr> <tr> <td>Conn Timeout: 10s (10 s)</td> <td>10s (10 s)</td> </tr> <tr> <td>TCP MSS: 05 Default</td> <td>05 Default</td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	Delayed ACK Settings	Delayed ACK Settings	Min: DEFAULT	DEFAULT	Max: DEFAULT	DEFAULT	Max Segments: DEFAULT	DEFAULT	Conn Timeout: 10s (10 s)	10s (10 s)	TCP MSS: 05 Default	05 Default	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">TX Endpoint</th> <th style="width: 50%;">RX Endpoint</th> </tr> </thead> <tbody> <tr> <td><input type="checkbox"/> Checksum</td> <td><input type="checkbox"/> Checksum</td> </tr> <tr> <td><input type="checkbox"/> UnManaged</td> <td><input type="checkbox"/> UnManaged</td> </tr> <tr> <td><input type="checkbox"/> Duration Quiesce</td> <td><input type="checkbox"/> Duration Quiesce</td> </tr> <tr> <td><input type="checkbox"/> Quiesce-After-Range</td> <td><input type="checkbox"/> Quiesce-After-Range</td> </tr> <tr> <td><input type="checkbox"/> TCP_NODELAY</td> <td><input type="checkbox"/> TCP_NODELAY</td> </tr> <tr> <td><input type="checkbox"/> Clear-Port-On-Start</td> <td><input type="checkbox"/> Clear-Port-On-Start</td> </tr> <tr> <td><input type="checkbox"/> Linear-IP-Ports</td> <td><input type="checkbox"/> Linear-IP-Ports</td> </tr> <tr> <td>Endp Name: tcp-se-A</td> <td>tcp-se-B</td> </tr> </tbody> </table>	TX Endpoint	RX Endpoint	<input type="checkbox"/> Checksum	<input type="checkbox"/> Checksum	<input type="checkbox"/> UnManaged	<input type="checkbox"/> UnManaged	<input type="checkbox"/> Duration Quiesce	<input type="checkbox"/> Duration Quiesce	<input type="checkbox"/> Quiesce-After-Range	<input type="checkbox"/> Quiesce-After-Range	<input type="checkbox"/> TCP_NODELAY	<input type="checkbox"/> TCP_NODELAY	<input type="checkbox"/> Clear-Port-On-Start	<input type="checkbox"/> Clear-Port-On-Start	<input type="checkbox"/> Linear-IP-Ports	<input type="checkbox"/> Linear-IP-Ports	Endp Name: tcp-se-A	tcp-se-B						
TX Endpoint	RX Endpoint																																						
Delayed ACK Settings	Delayed ACK Settings																																						
Min: DEFAULT	DEFAULT																																						
Max: DEFAULT	DEFAULT																																						
Max Segments: DEFAULT	DEFAULT																																						
Conn Timeout: 10s (10 s)	10s (10 s)																																						
TCP MSS: 05 Default	05 Default																																						
TX Endpoint	RX Endpoint																																						
<input type="checkbox"/> Checksum	<input type="checkbox"/> Checksum																																						
<input type="checkbox"/> UnManaged	<input type="checkbox"/> UnManaged																																						
<input type="checkbox"/> Duration Quiesce	<input type="checkbox"/> Duration Quiesce																																						
<input type="checkbox"/> Quiesce-After-Range	<input type="checkbox"/> Quiesce-After-Range																																						
<input type="checkbox"/> TCP_NODELAY	<input type="checkbox"/> TCP_NODELAY																																						
<input type="checkbox"/> Clear-Port-On-Start	<input type="checkbox"/> Clear-Port-On-Start																																						
<input type="checkbox"/> Linear-IP-Ports	<input type="checkbox"/> Linear-IP-Ports																																						
Endp Name: tcp-se-A	tcp-se-B																																						

- C. Start the test by selecting the **tcp-se** row and click **Start**. Right-click and select **Dynamic Report** to get a real-time graph of the throughput. We see about 250Mbps of TCP throughput.

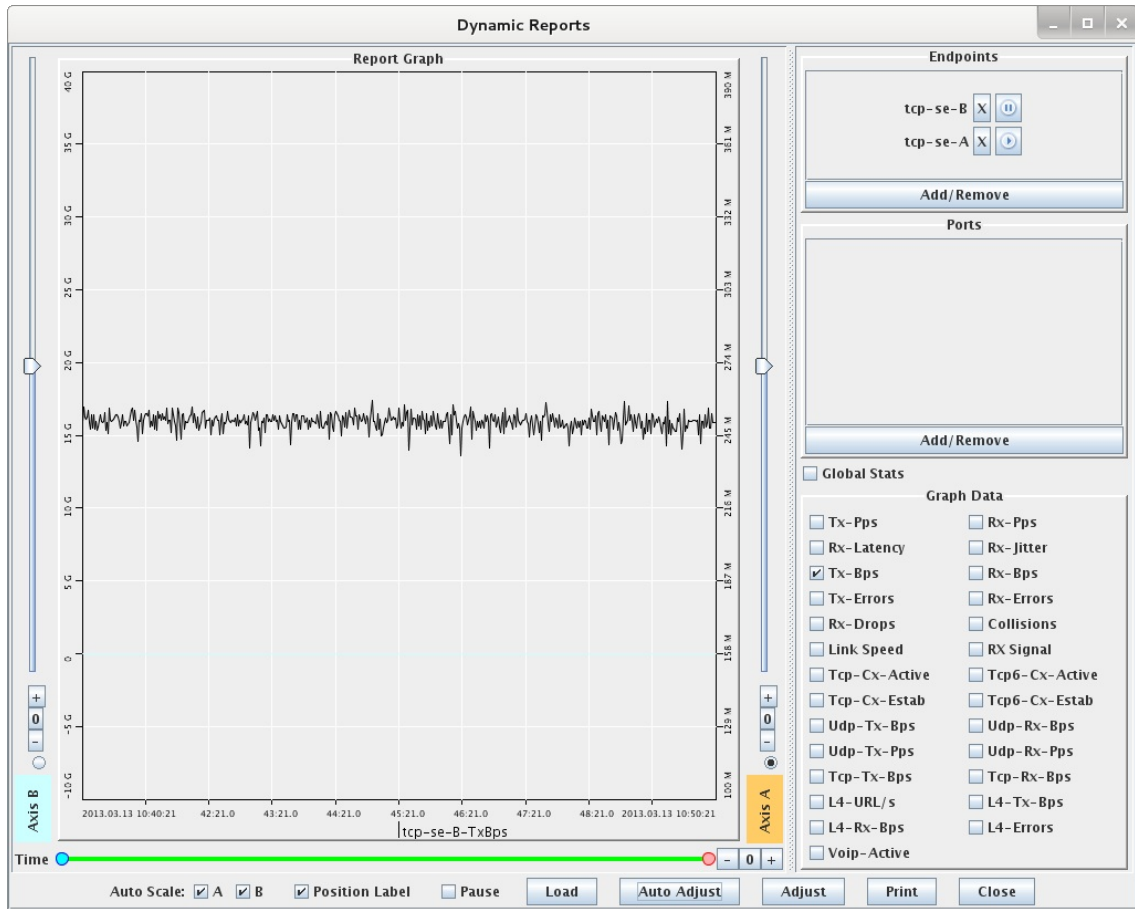

2. Test TCP upload throughput with one station (WPA2)

- A. Modify the VAP to use WPA2 instead of being open. Go to Port-Mgr tab, select vap0, and click **Modify**

The screenshot shows the 'vap0 (brent-523) Configure Settings' window. The 'Port Status Information' section shows 'Current: LINK-UP GRO NONE' and 'Driver Info: Port Type: WIFI-AP Parent: wiphy0'. The 'Port Configurables' section has four tabs: 'Standard Configuration', 'Advanced Configuration', 'Misc Configuration', and 'Custom WiFi'. The 'Standard Configuration' tab is active, showing 'Enable' and 'Services' options. The 'General Interface Settings' section includes 'Down', 'Aux-Mgt', 'DHCP-IPv6', 'DHCP Release', 'DHCP Vendor ID', 'DHCP Client ID', 'DNS Servers', 'IP Address', 'IP Mask', 'Gateway IP', 'Alias', 'MAC Addr', and 'Rpt Timer'. The 'WiFi Settings' section includes 'SSID', 'Key/Phrase', 'Freq/Channel', 'DTIM-Period', 'Beacon', 'AP', 'Mode', 'Rate', and 'Max-STA'. The 'Security' section has checkboxes for 'WPA', 'WPA2', 'OSEN', 'WEP', 'Disable HT40', 'Disable HT80', and 'Disable SGI'. The 'WPA2' checkbox is checked. At the bottom, there are buttons for 'Print', 'View Details', 'Logs', 'Probe', 'Display Scan', 'Sync', 'Apply', 'OK', and 'Cancel'.

- B. Configure wlan0 to use the same settings so it can connect to the VAP using WPA2 authentication.
- C. Go to the Layer-3 tab, start the **tcp-se** connection, right-click and select **Dynamic Report** to get a real-time graph of the throughput. We see about 43Mbps of TCP throughput. LANforge currently does the WPA encryption in software on the CPU, so it is much slower than un-encrypted traffic.

3. Test TCP throughput with 50 stations (Open)

- A. Go to the **Port-Mgr** tab, select the existing wlan0 and vap0 interfaces, click **Modify**, un-select WPA2 on each of them, and click Apply. This changes wlan0 and vap0 back to Open mode.
- B. Go to the **Port-Mgr** tab, select the wiphy0 interface on the second system, and click **Create**. Select **Wifi STA**, enter starting MAC, quantity of 49, select DHCP-IPv4, STA ID of 0, SSID, and Key/Phrase. When properly configured, click **Apply**

- C. You should now see all 50 stations associated with IP addresses.

Port	Phn...	Down	IP	SEC	Alias	RX Bytes	RX Pkts	Pps RX	bps RX	TX Bytes	TX Pkts	Pps TX	bps TX
1.3.01			0.0.0.0	0	eth1	0	0	0	0	0	0	0	0
1.3.02			10.97.3.25	0	sta0	1,452	6	0	0	1,012	8	0	0
1.3.03			0.0.0.0	0	wiphy0	1,343,3...	145,931...	851	644,416	180,125...	3,472,7...	20,012	245,850...
1.3.04			10.97.1.207	0	wlan0	2,830,0...	73,507...	841	444,084	178,910...	1,793,7...	19,969	245,032...
1.3.05			11.97.1.1	0	vap0	7,092	50	0	0	13,848	89	0	0
1.3.06			10.97.2.248	0	sta1	42,654	437	0	0	1,012	8	0	0
1.3.07			10.97.3.18	0	sta2	42,654	437	0	0	902	7	0	0
1.3.08			10.97.3.17	0	sta3	42,564	436	0	0	902	7	0	0
1.3.09			10.97.2.251	0	sta4	42,564	436	0	0	902	7	0	0
1.3.10			10.97.2.252	0	sta5	42,486	435	0	0	902	7	0	0
1.3.11			10.97.3.2	0	sta6	42,318	433	0	0	1,012	8	0	0
1.3.12			10.97.2.249	0	sta7	42,228	432	0	0	1,012	8	0	0
1.3.13			10.97.2.250	0	sta8	42,060	430	0	0	1,012	8	0	0
1.3.14			10.97.2.254	0	sta9	41,196	426	0	0	950	7	0	0
1.3.15			10.97.2.255	0	sta10	41,712	426	0	0	902	7	0	0
1.3.16			10.97.2.253	0	sta11	41,712	426	0	0	902	7	0	0
1.3.17			10.97.3.0	0	sta12	40,938	423	0	0	950	7	0	0
1.3.18			10.97.3.3	0	sta13	40,938	423	0	0	840	6	0	0
1.3.19			10.97.3.4	0	sta14	41,622	425	0	0	902	7	0	0
1.3.20			10.97.3.1	0	sta15	41,532	424	0	0	1,012	8	0	0
1.3.21			10.97.3.5	0	sta16	41,442	423	0	0	1,012	8	0	0
1.3.22			10.97.3.7	0	sta17	31,500	336	0	0	950	7	0	0
1.3.23			10.97.3.6	0	sta18	31,416	334	0	0	840	6	0	0

- D. Go to the **Layer-3** tab, modify the 'tcp-se' connection. Change the name to tcp-se-0001, and change the RX Endpoint side's port from wlan0 to sta0. Click **OK** to create the new connection.

- E. Now, create 48 more copies. Modify the tcp-se-0001 connection and click **Batch-Create**. Set quantity to 48, and Port Increment A to 0. Click **Apply** to create the 48 TCP connections, one on each of the 48 stations.

Layer-3 Batch Creator: tcp-se-0001

Names to be created: tcp-se-0002, tcp-se-0003 ... tcp-se-0049

Endp-A Resources: 1, 1 ... 1

Endp-B Resources: 3, 3 ... 3

Endp-A Ports: vap0, vap0 ... vap0

Endp-B Ports: sta1, sta2 ... sta48

Endp-A IPs: AUTO, AUTO ... AUTO

Endp-B IPs: AUTO, AUTO ... AUTO

Quantity: Number of Digits: Zero Padding

Starting Name Suffix: Name Increment:

Resource Increment A: Resource Increment B:

Port Increment A: Port Increment B:

IP Addr Increment A: IP Addr Increment B:

IP-Port Increment A: IP-Port Increment B:

- F. Select all of the tcp-se connections and click **Start**. Each of the connections are configured for higher rates than the network can actually handle. This is OK, but it will give un-even throughput results on different stations. So, you may wish to change the rate to something lower. If so, go to the **L3 Endps** tab, make sure all of the tcp-se endpoints are selected, and click **Batch Modify**. Select **B Only** since we want to just modify one side of the connection. Set Min Tx Rate to 5Mbps, and click **Apply**

LANforge Layer-3 Batch Modifier

Both Endpoints A Only B Only

Min Tx Rate: Max Tx Rate:

Min PDU Size: Max PDU Size:

Pld Pattern:

Min IP Port: Max IP Port:

Quiesce: IP ToS:

Pkts To Send: Script:

Min Duration: Max Duration:

Min Reconn: Max Reconn:

TCP MSS: Max Delayed Ack Segments:

Minimum Delayed Ack: Maximum Delayed Ack:

Send Buffer Size: Receive Buffer Size:

Multi-Conn:

G. Go back to the **Layer-3** tab and view the running connections.

LANforge Manager Version(5.2.8)

Control Reporting Tear-Off Info

Stop All Restart Manager Refresh HELP

Layer-4 Generic Test Mgr Test Group Resource Mgr Serial Spans PPP-Links Event Log Alerts Port Mgr Messages
 Status Layer-3 L3 Endps VolP/RTP VolP/RTP Endps Armageddon WanLinks Attenuators Collision-Domains File-IO

Rpt Timer: fast (1 s) Go Test Manager all Select All Start Stop Quiesce Clear

View 0 - 200 Display Create Modify Delete

Cross Connects for Selected Test Manager

Name	Type	State	Pkt Tx A->B	Pkt Tx A<-B	Rate A->B	Rate A<-B	Rx Drop % A	Rx Drop % B	Drop Pkts A	Drop Pkts B	Avg RTT
tcp-es	LF/TCP	Stopped	0	0	0	0	0	0	0	0	0
tcp-se	LF/TCP	Run	0	2,222	0	4,999,120	0	0	0	0	13
tcp-se-0001	LF/TCP	Run	0	1,738	0	4,998,346	0	0	0	0	11
tcp-se-0002	LF/TCP	Run	0	2,220	0	4,995,886	0	0	0	0	16
tcp-se-0003	LF/TCP	Run	0	2,222	0	4,997,169	0	0	0	0	18
tcp-se-0004	LF/TCP	Run	0	2,225	0	4,997,485	0	0	0	0	16
tcp-se-0005	LF/TCP	Run	0	2,225	0	4,997,378	0	0	0	0	20
tcp-se-0006	LF/TCP	Run	0	2,225	0	4,997,399	0	0	0	0	24
tcp-se-0007	LF/TCP	Run	0	2,226	0	4,997,590	0	0	0	0	28
tcp-se-0008	LF/TCP	Run	0	2,226	0	4,997,633	0	0	0	0	25
tcp-se-0009	LF/TCP	Run	0	2,226	0	4,997,654	0	0	0	0	34
tcp-se-0010	LF/TCP	Run	0	2,220	0	4,996,122	0	0	0	0	36
tcp-se-0011	LF/TCP	Run	0	2,220	0	4,996,122	0	0	0	0	30
tcp-se-0012	LF/TCP	Run	0	2,225	0	4,997,570	0	0	0	0	35
tcp-se-0013	LF/TCP	Run	0	2,225	0	4,997,592	0	0	0	0	32
tcp-se-0014	LF/TCP	Run	0	2,225	0	4,997,570	0	0	0	0	35
tcp-se-0015	LF/TCP	Run	0	2,225	0	4,997,613	0	0	0	0	45
tcp-se-0016	LF/TCP	Run	0	2,225	0	4,997,656	0	0	0	0	39
tcp-se-0017	LF/TCP	Run	0	2,225	0	4,997,635	0	0	0	0	48
tcp-se-0018	LF/TCP	Run	0	2,225	0	4,997,656	0	0	0	0	46
tcp-se-0019	LF/TCP	Run	0	2,225	0	4,997,677	0	0	0	0	46
tcp-se-0020	LF/TCP	Run	0	2,225	0	4,997,635	0	0	0	0	49

Logged in to: 192.168.100.138:4002 as: Admin

H. Determine total throughput: Select all of the running connections and then Right-Click and select **Calculations**. In this scenario, we see about 230Mbps of total TCP throughput.

LANforge Table Calculations

Totals

Calculation	Pkt Tx A->B	Pkt Tx A<-B	Rate A->B	Rate A<-B	Rx Drop % A	Rx Drop % B	Drop Pkts A	Drop Pkts B	Avg RTT
Sum	0.00	91,792.00	0.00	230,609,918.00	2.60	0.00	2.00	0.00	231,985.00
Mean (Average)	0.00	1,835.84	0.00	4,612,198.36	0.05	0.00	0.04	0.00	4,639.70
Median	0.00	1,990.00	0.00	4,998,776.00	0.00	0.00	0.00	0.00	55.00

Deviations

Name	Pkt Tx A->B	Pkt Tx A<-B	Rate A->B	Rate A<-B	Rx Drop % A	Rx Drop % B	Drop Pkts A	Drop Pkts B	Avg RTT
tcp-se	0.00	150.16	0.00	386,577.64	-0.05	0.00	-0.04	0.00	-4,623.70
tcp-se-0001	0.00	151.16	0.00	386,862.64	-0.05	0.00	-0.04	0.00	-4,620.70
tcp-se-0002	0.00	159.16	0.00	385,405.64	-0.05	0.00	-0.04	0.00	-4,617.70
tcp-se-0003	0.00	150.16	0.00	386,769.64	-0.05	0.00	-0.04	0.00	-4,615.70
tcp-se-0004	0.00	150.16	0.00	386,793.64	-0.05	0.00	-0.04	0.00	-4,613.70
tcp-se-0005	0.00	150.16	0.00	386,793.64	-0.05	0.00	-0.04	0.00	-4,610.70
tcp-se-0006	0.00	151.16	0.00	386,934.64	-0.05	0.00	-0.04	0.00	-4,607.70
tcp-se-0007	0.00	152.16	0.00	387,027.64	-0.05	0.00	-0.04	0.00	-4,604.70
tcp-se-0008	0.00	150.16	0.00	386,865.64	-0.05	0.00	-0.04	0.00	-4,602.70
tcp-se-0009	0.00	150.16	0.00	386,817.64	-0.05	0.00	-0.04	0.00	-4,601.70
tcp-se-0010	0.00	150.16	0.00	386,841.64	-0.05	0.00	-0.04	0.00	-4,600.70
tcp-se-0011	0.00	150.16	0.00	386,841.64	-0.05	0.00	-0.04	0.00	-4,598.70
tcp-se-0012	0.00	150.16	0.00	386,817.64	-0.05	0.00	-0.04	0.00	-4,598.70
tcp-se-0013	0.00	150.16	0.00	386,841.64	-0.05	0.00	-0.04	0.00	-4,595.70
tcp-se-0014	0.00	150.16	0.00	386,865.64	-0.05	0.00	-0.04	0.00	-4,594.70
tcp-se-0015	0.00	150.16	0.00	386,817.64	-0.05	0.00	-0.04	0.00	-4,592.70

Refresh Close

4. Test TCP upload throughput with 50 stations (WPA2)

- A. Modify the VAP and stations to use WPA2 instead of being open. Go to Port-Mgr tab, select vap0, and all of the stations and click **Batch Modify**. Change WPA2 to be 'ON' and enter password in the Key/Phrase box. Leave all other values set to 'NA' so they are not changed.

- B. Go back to the Layer-3 tab, select all of the connections, and click **Clear** to clear the counters. Right-Click and select Calculations to view the totals. In this scenario, we see about 50Mbps of TCP throughput.

5. Test TCP upload throughput with 128 stations

- A. Use similar steps to those described above to create 78 more stations. In the Create VLANs window, use STA ID of 49 and Quantity of 78 this time (since stations 0-48 have already been created). When creating more TCP connections, you can click **Modify** on the tcp-se-0049 connection and click **Batch Create**.
- B. In this scenario, we see about 36Mbps throughput with TCP in WPA2 mode, and 28Mbps to 40Mbps in Open mode.