


LANforge as Access Point

Goal: Create four LANforge APs in bridged mode using Chamber View

In this test scenario, two LANforge CT522 systems are used to create 4 APs. The APs could be used for testing client devices such as phones. This is a simple example with no authentication.

1. Configure Chamber View to create Access Points.

- A. Open Chamber View by clicking on the 'Chamber View' button in the LANforge-GUI. You can right-click in Chamber View to create various objects. The LANforge system(s) should show up as green boxes in Chamber View.

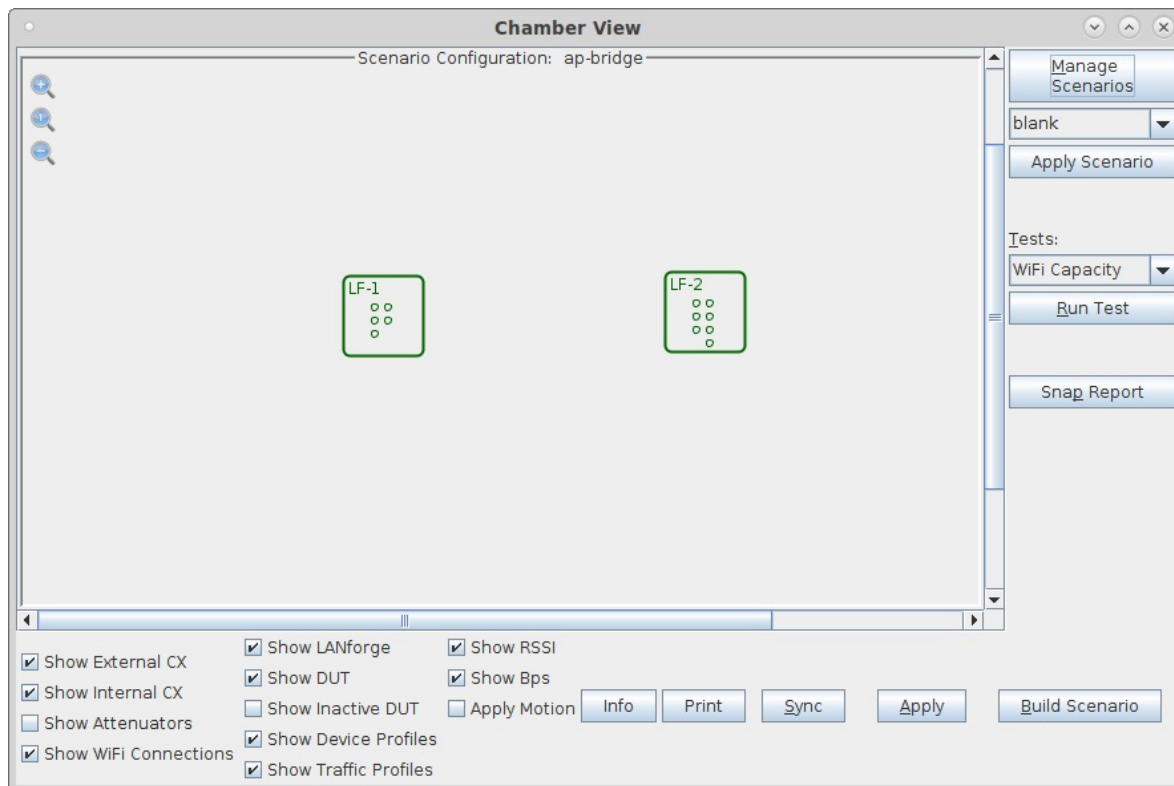

B. Configure a Chamber View Scenario and add the AP profiles.

Del	Resource Profile	Mod	Amount	Uses-1	Uses-2	Frequency	Maps To
X	1.1 ▼ Bridged_AP: bridged-AP-0 ▼	✎	1 (1) ▼	wiphy0 ▼	eth1 ▼	36 (5180 Mhz) ▼	NA ▼
X	1.1 ▼ Bridged_AP: bridged-AP-1 ▼	✎	1 (1) ▼	wiphy1 ▼	eth1 ▼	36 (5180 Mhz) ▼	NA ▼
X	1.2 ▼ Bridged_AP: bridged-AP-2 ▼	✎	1 (1) ▼	wiphy0 ▼	eth1 ▼	36 (5180 Mhz) ▼	NA ▼
X	1.2 ▼ Bridged_AP: bridged-AP-3 ▼	✎	1 (1) ▼	wiphy1 ▼	eth1 ▼	36 (5180 Mhz) ▼	NA ▼

C. This example uses 4 different bridged-AP profiles. Each profile is the same except that it has a different SSID.

Name: bridged-AP-0 Type: Bridged_AP (2)
Mode: Auto (0) Antennas: Default (0)
Instances: 1 (1) Frequency: 36 (5180 Mhz)
SSID: jw3-0 Password:
Pattern:
 WPA WPA2 WPA3 802.11r
 802.1x EAP-TTLS Restart DHCP on Connect Notes:

Apply OK Cancel

- D. Once you have saved and selected the Scenario, click **Apply Scenario** and then click **Build Scenario**. The APs will be created, bridge devices will be created and will contain the APs and the Ethernet ports selected in the scenario. The Access Point devices will be started as part of the build process, so the system is now ready to be used. You can also make further GUI modifications to the AP configuration by modifying the vap interfaces in the Port-Mgr tab of the LANforge GUI.

