

## Configuring Serial Connection to LANforge

**Goal:** Using a serial cable and terminal emulator on Windows to connect to LANforge.


If you experience crashes or system misconfiguration, a network link to LANforge can become unavailable. LANforge machines are shipped with a serial cable for just this possibility. Most LANforge servers come with standard RS232 DB9 pin serial ports, other models have a special RJ45 style connector. You might need a USB to Serial adapter to connect your laptop to the serial cable.




### 1. Connect Serial Cable to LANforge

A. We will use a CT525 for our example There are two different types of CT525, some have a I/O shield with colors, others do not. Both have DB9 serial ports:


B. Picture of an unmarked I/O plate:

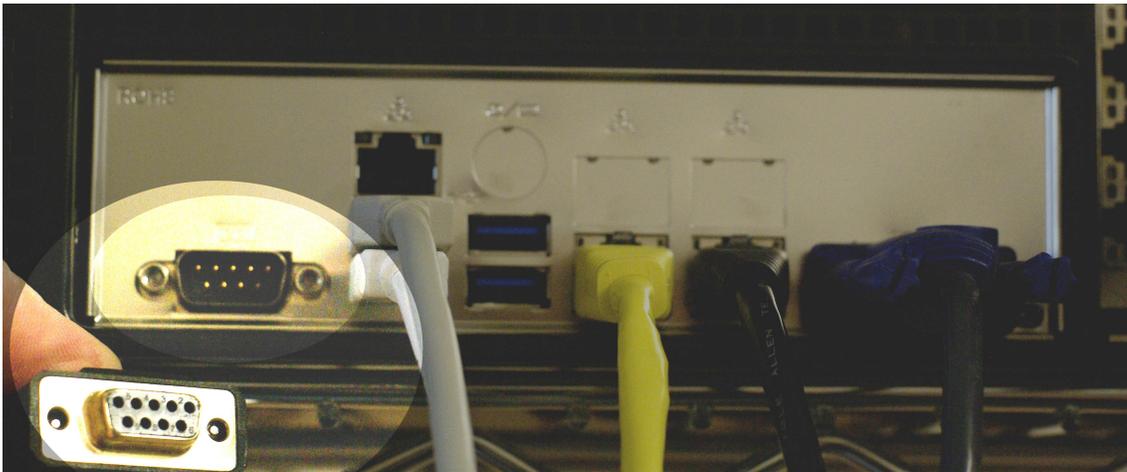

C. Picture of a colorized I/O plate:

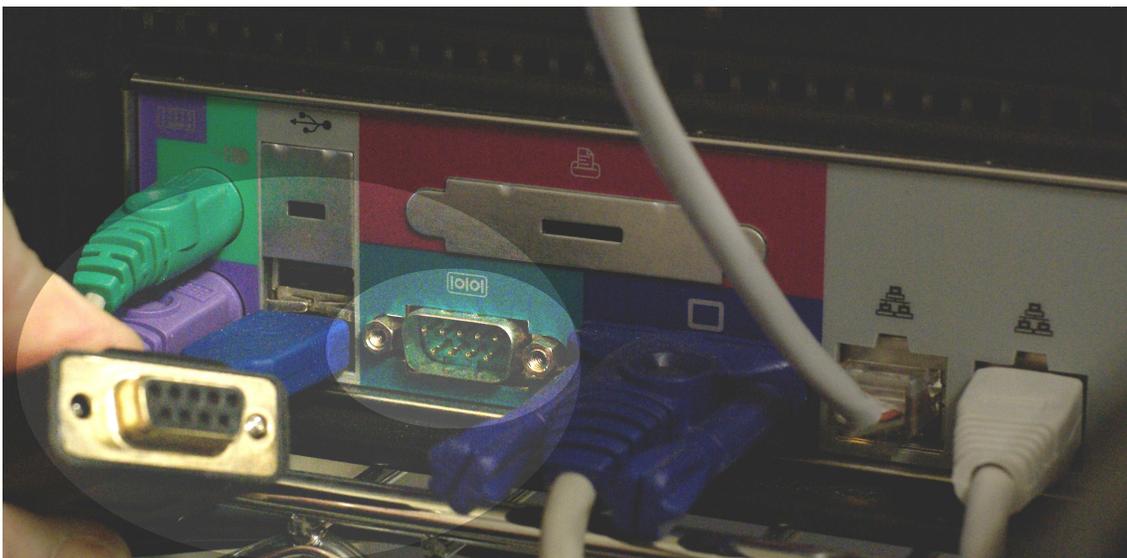


D. Picture of a colorized I/O plate plugged in:

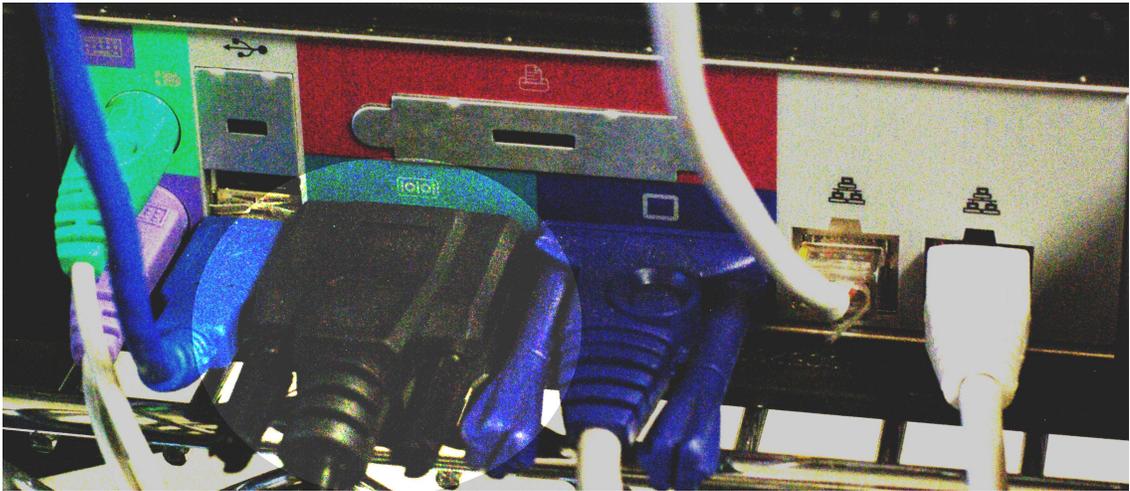

E. Other LANforge chassis models can have either RJ45 or DB9 serial ports.


## 2. Connect Serial Cable to Windows

- A. Chances are you will be connecting a USB to Serial adapter to your laptop.
- B. Typically, right after you connect the cable to your USB port, you will see a message from Windows letting you know a new drive has been installed.
- C. Windows will map this USB adapter to a COM port. Use Device Manager to discover the new COM port:
  - A. Press the Windows key and type `device manager`

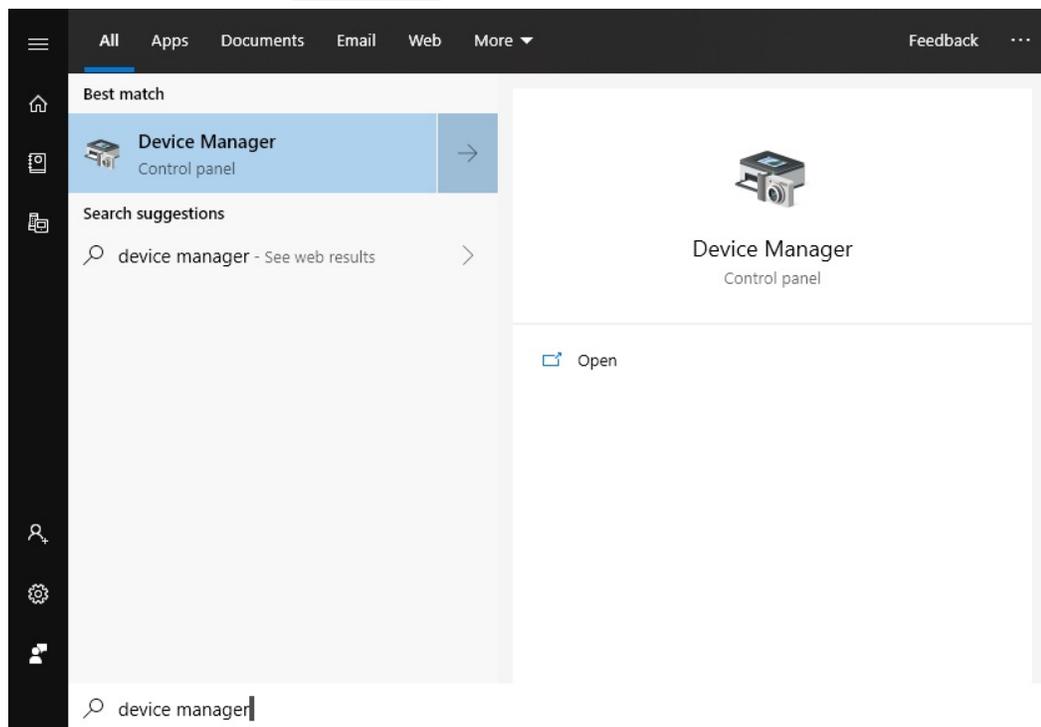

B. Hit **Enter** to open the Device Manager


C. In Device Manager, select **Ports**

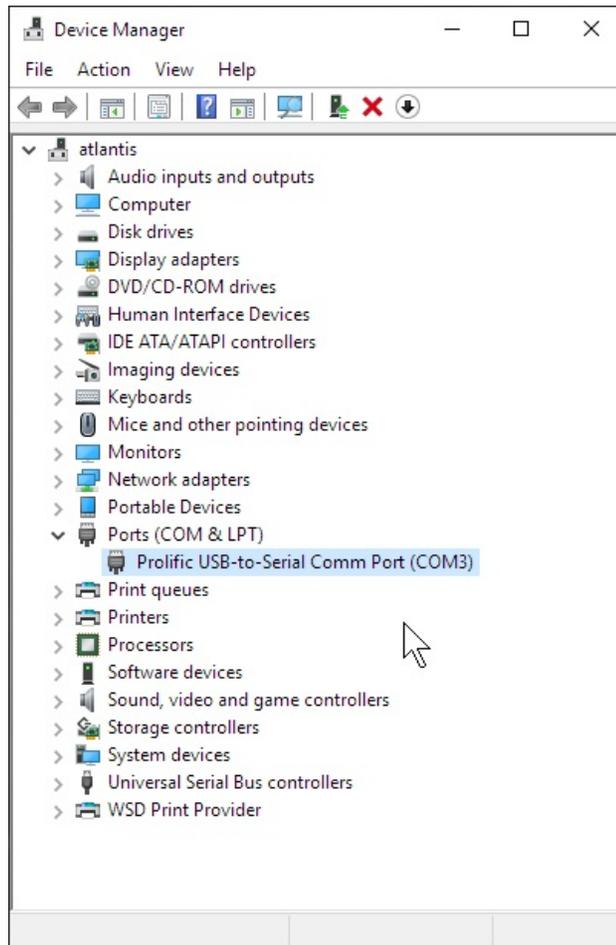


D. In this example, we see that our new USB device was assigned **COM3**.

### 3. Configure PuTTY to connect to serial port


A. Press the Windows key and search for **putty**

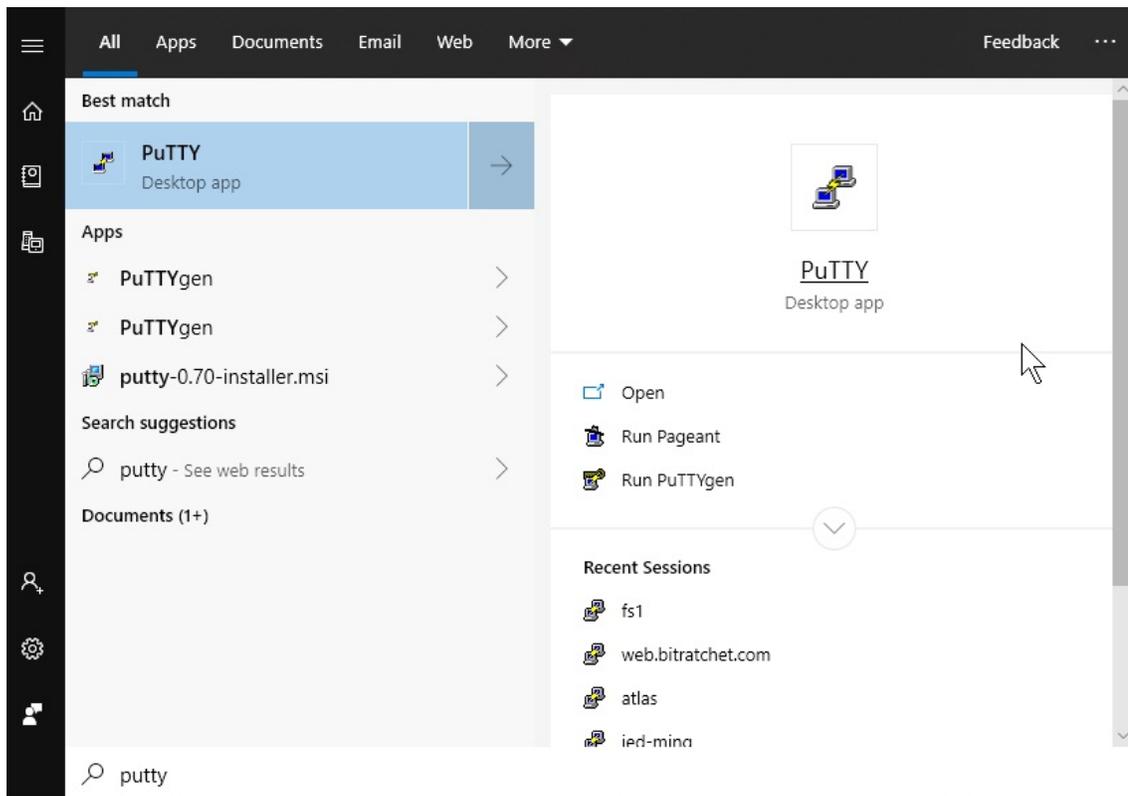


B. When you double click on the PuTTY icon and it launches, you can start customizing your session preferences

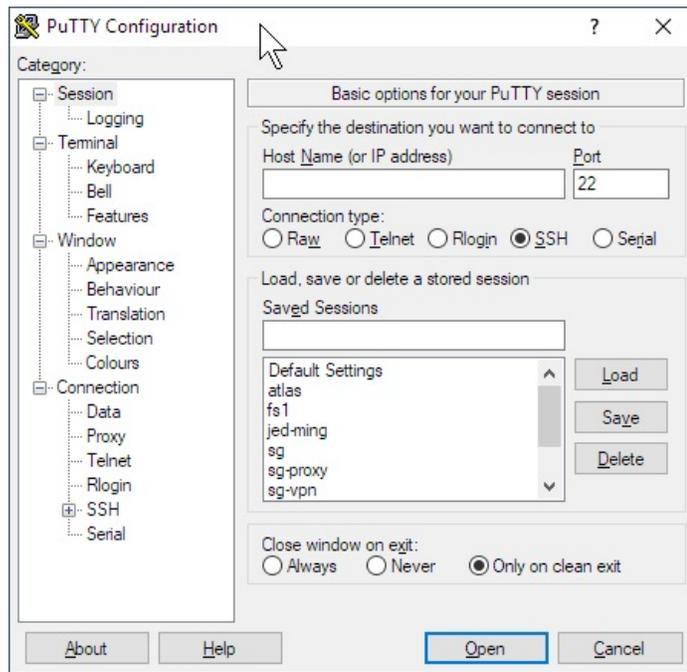


C. Start by setting your connection type (serial), serial device (com3) and speed (115200). Name your session 'com3'

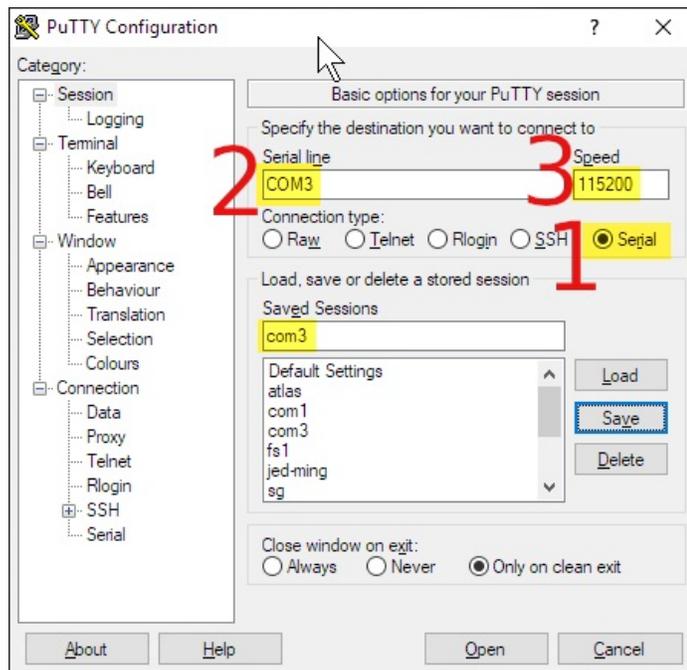


- D. Select category Serial, specify the Serial Line **COM3**, speed (115200) and set both Parity and Flow Control to **None**.

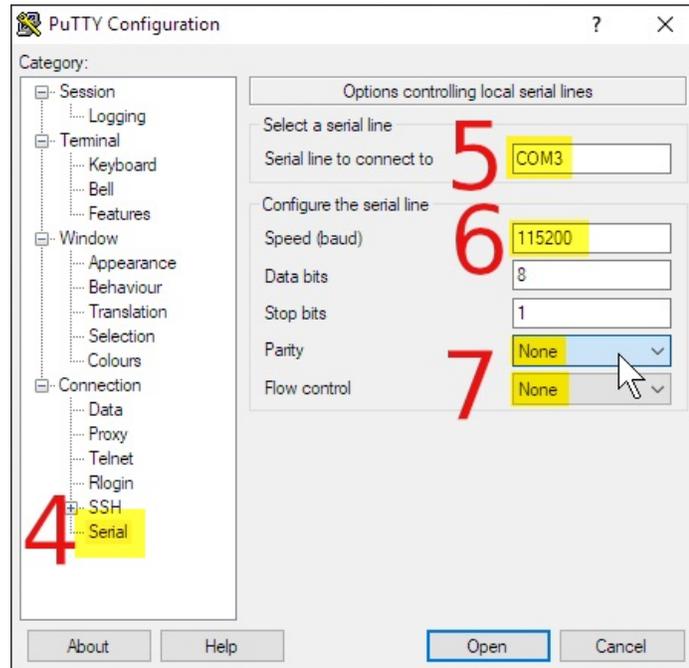

- E. Select the **Session**→**Logging** category, select Printable Output and name set the Log file name as you prefer. This allows you to collect your commands as notes for later.

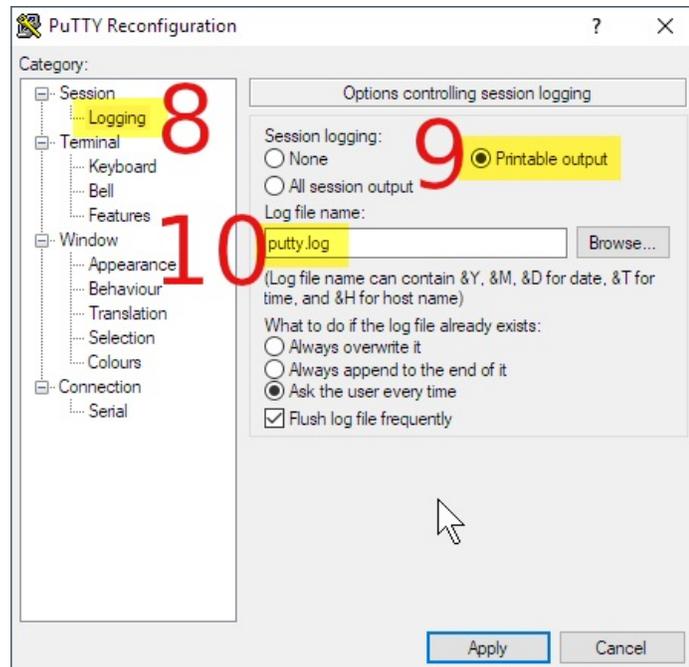


F. Select the **Session** category, save the `com3` profile and click **Save**

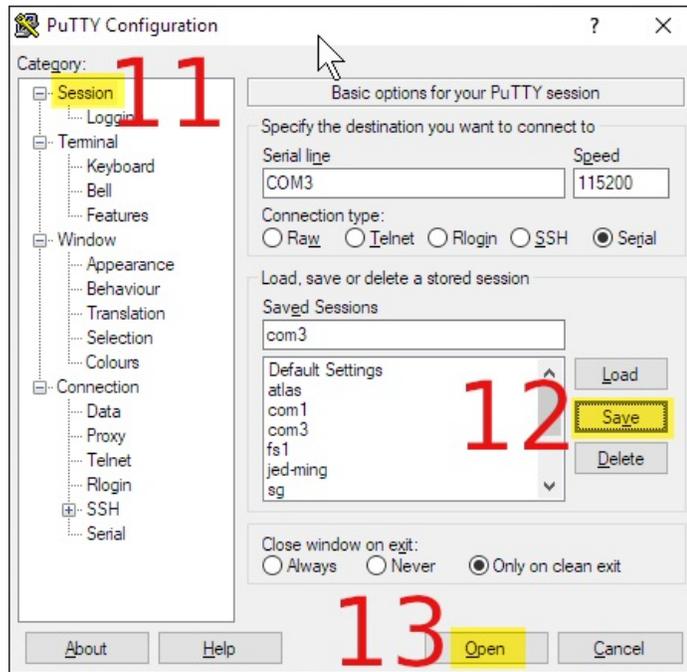

G. Click the **Open** button. You will see a terminal window appear.


4. Use PuTTY to Log In over COM3

- A. If the screen is blank, hit `Enter` to see a login prompt.
- B. Enter username `lanforge` `Enter` , password `lanforge` `Enter`

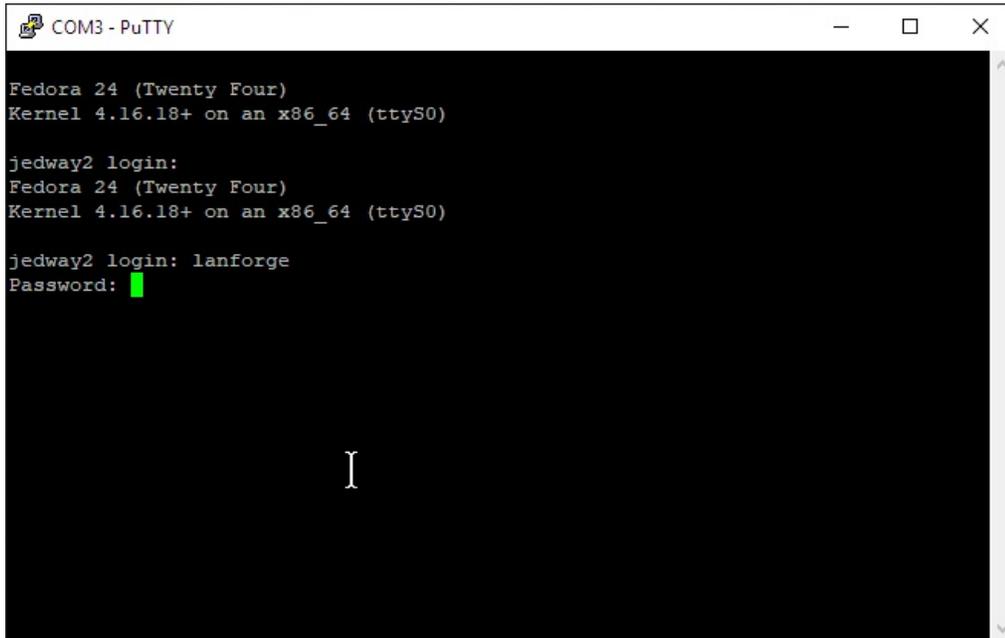


5. Collect console output to a logfile

A. step 1

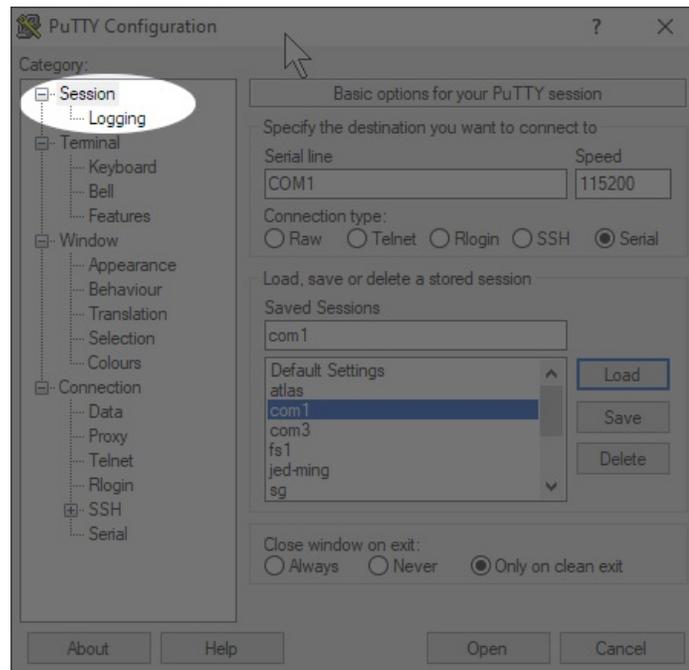

B. step 1

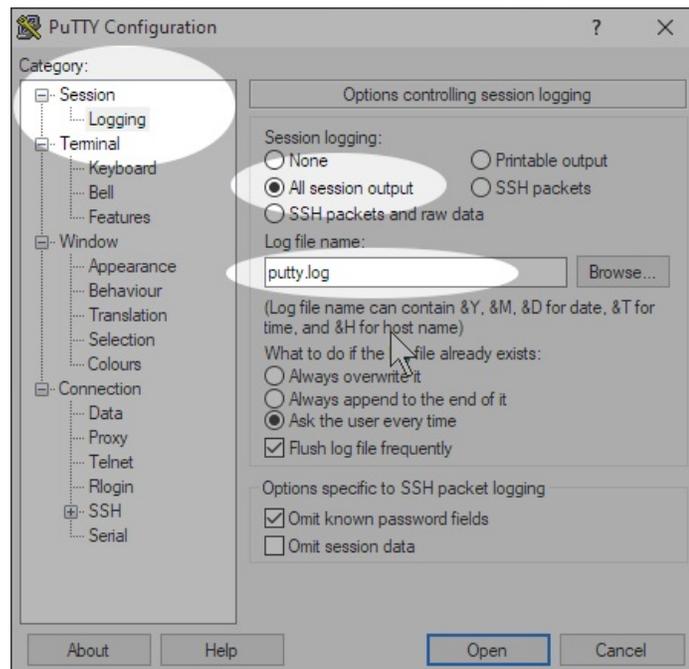


6. **Common Commands Cheat Sheet:** Hit **Enter** after all commands

- A. `pwd` **Enter** : print current directory
- B. `ls` **Enter** : list items in directory
- C. `cd` **Enter** : change to your Home Directory
- D. `cd /home/lanforge` **Enter** : go to LANforge home directory
- E. `cd /root` **Enter** : go to root user's home directory
- F. `sudo ./serverctl.bash restart` **Enter** : Restart LANforge service
- G. `sudo reboot` **Enter** : reboot machine
- H. `ip a show` **Enter** : show interface addresses
- I. `df -h` **Enter** : show disk usage

- J. `mv script.sh.txt /home/lanforge/scripts/script.sh` `Enter` : move file to new name
- K. `dos2unix script.sh` `Enter` : Remove DOS/Windows CRLF style line endings
- L. `chmod +x script.sh` `Enter` : Turn script executable
- M. `./script.sh` `Enter` : Run script in current directory

7. Example of clearing disk space on a LANforge machine

- A. One common problem with any LANforge machine is cleaning out old kernels. This is an example that shows you how to check disk space and how to remove unused kernels.
- B. Check disk space with the `df -h` command

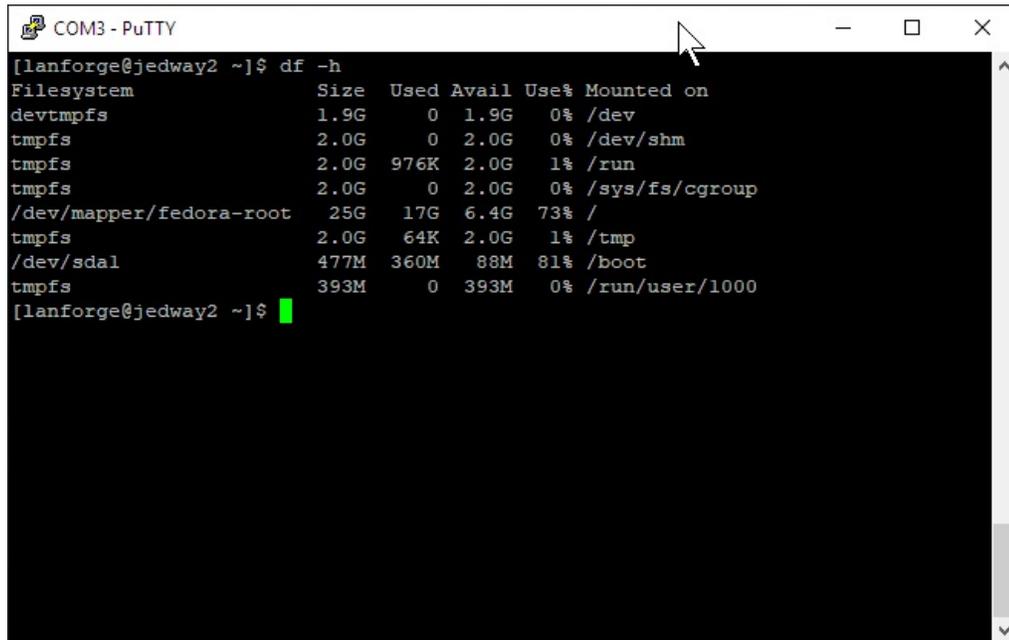

```
COM3 - PuTTY
[lanforge@jedway2 ~]$ df -h

```

Filesystem	Size	Used	Avail	Use%	Mounted on
devtmpfs	1.9G	0	1.9G	0%	/dev
tmpfs	2.0G	0	2.0G	0%	/dev/shm
tmpfs	2.0G	976K	2.0G	1%	/run
tmpfs	2.0G	0	2.0G	0%	/sys/fs/cgroup
/dev/mapper/fedora-root	25G	17G	6.4G	73%	/
tmpfs	2.0G	64K	2.0G	1%	/tmp
/dev/sdal	477M	360M	88M	81%	/boot
tmpfs	393M	0	393M	0%	/run/user/1000

```
[lanforge@jedway2 ~]$
```


- C. Use the `dmesg` command to see if there are system warning.



```
COM3 - PuTTY
[root@jedway2 boot]# dmesg > /tmp/dmesg.log
[root@jedway2 boot]# less /tmp/dmesg.log
```


I

- D. go to the /boot directory. The `uname -r` command tells you which kernel you are currently running. You may remove old `ct` kernels.

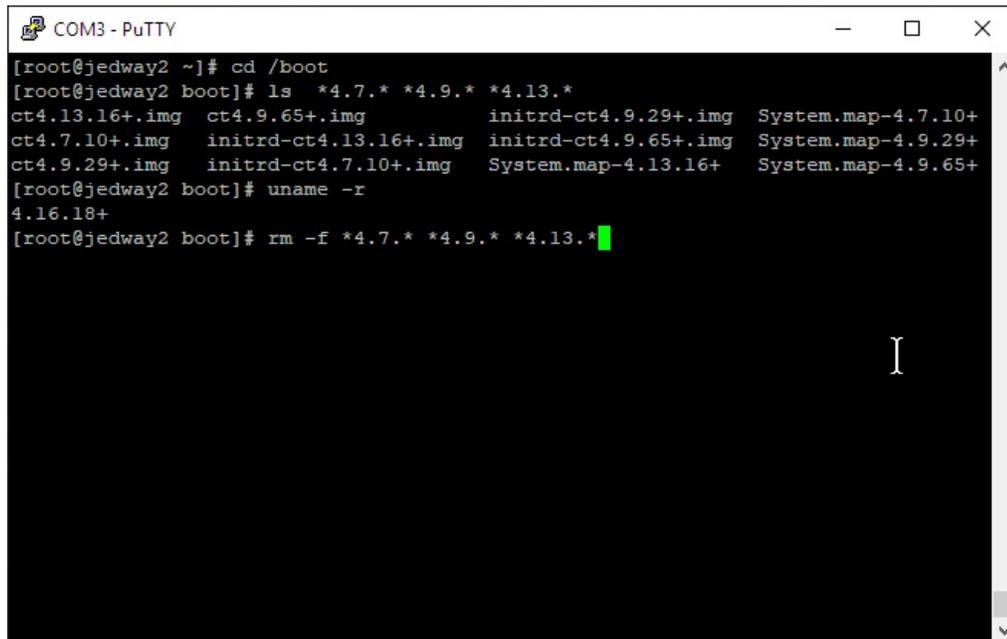


```
COM3 - PuTTY
[root@jedway2 ~]# cd /boot
[root@jedway2 boot]# ls *4.7.* *4.9.* *4.13.*
ct4.13.16+.img  ct4.9.65+.img          initrd-ct4.9.29+.img  System.map-4.7.10+
ct4.7.10+.img   initrd-ct4.13.16+.img  initrd-ct4.9.65+.img  System.map-4.9.29+
ct4.9.29+.img   initrd-ct4.7.10+.img   System.map-4.13.16+   System.map-4.9.65+
[root@jedway2 boot]# uname -r
4.16.18+
[root@jedway2 boot]# rm -f *4.7.* *4.9.* *4.13.*
```

- E. In addition to removing old kernels, you can remove modules that correspond to those kernels

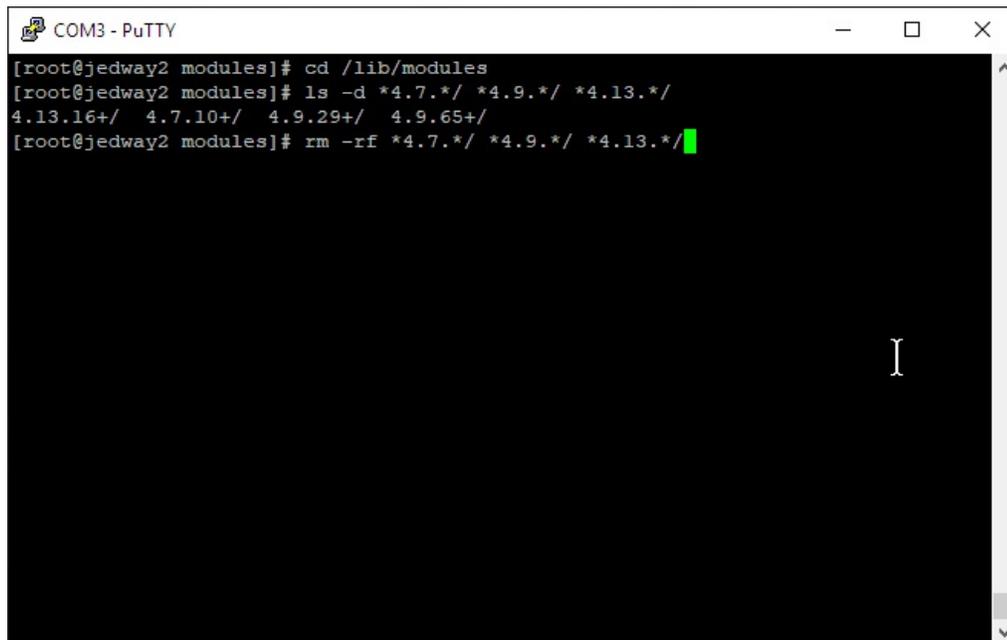


```
COM3 - PuTTY
[root@jedway2 modules]# cd /lib/modules
[root@jedway2 modules]# ls -d *4.7.*/* *4.9.*/* *4.13.*/*
4.13.16+/* 4.7.10+/* 4.9.29+/* 4.9.65+/*
[root@jedway2 modules]# rm -rf *4.7.*/* *4.9.*/* *4.13.*/*
```

F. After old kernels and modules have been removed, we re-run `grub2-mkconfig` to regenerate the boot menu:

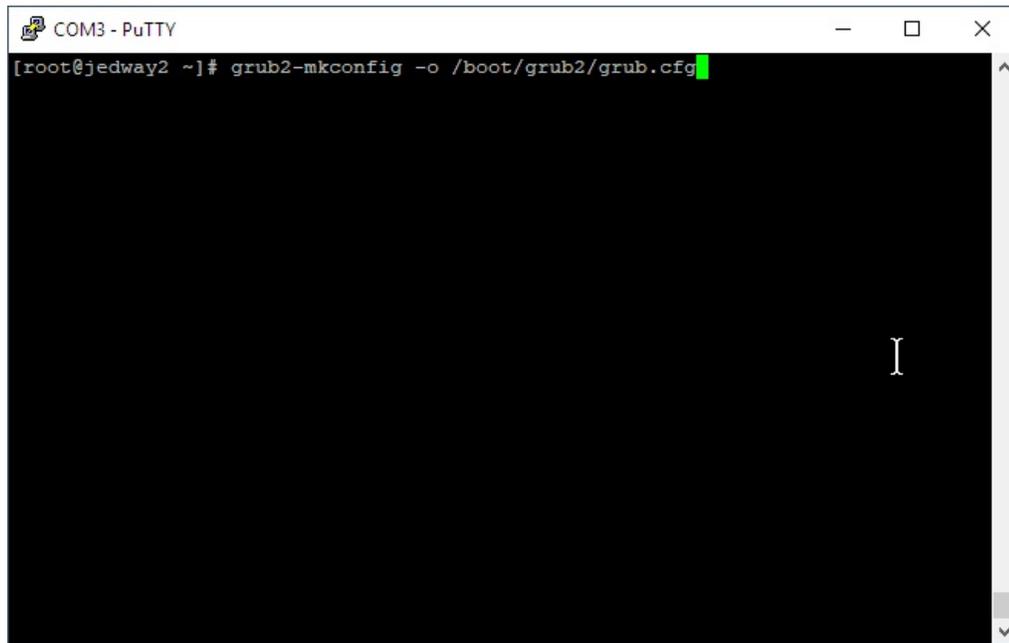

```
COM3 - PuTTY
[root@jedway2 ~]# grub2-mkconfig -o /boot/grub2/grub.cfg
```

G. the results will look like this:

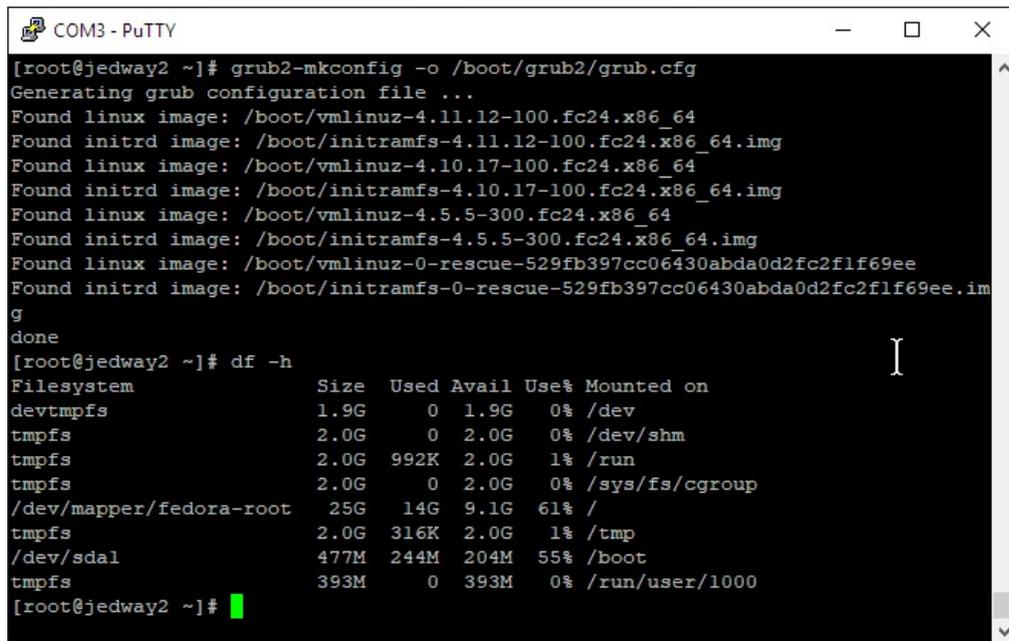

```
COM3 - PuTTY
[root@jedway2 ~]# grub2-mkconfig -o /boot/grub2/grub.cfg
Generating grub configuration file ...
Found linux image: /boot/vmlinuz-4.11.12-100.fc24.x86_64
Found initrd image: /boot/initramfs-4.11.12-100.fc24.x86_64.img
Found linux image: /boot/vmlinuz-4.10.17-100.fc24.x86_64
Found initrd image: /boot/initramfs-4.10.17-100.fc24.x86_64.img
Found linux image: /boot/vmlinuz-4.5.5-300.fc24.x86_64
Found initrd image: /boot/initramfs-4.5.5-300.fc24.x86_64.img
Found linux image: /boot/vmlinuz-0-rescue-529fb397cc06430abda0d2fc2f1f69ee
Found initrd image: /boot/initramfs-0-rescue-529fb397cc06430abda0d2fc2f1f69ee.img
done
[root@jedway2 ~]# df -h
Filesystem      Size  Used Avail Use% Mounted on
devtmpfs        1.9G   0 1.9G   0% /dev
tmpfs           2.0G   0 2.0G   0% /dev/shm
tmpfs           2.0G 992K 2.0G   1% /run
tmpfs           2.0G   0 2.0G   0% /sys/fs/cgroup
/dev/mapper/fedora-root 25G  14G  9.1G  61% /
tmpfs           2.0G 316K 2.0G   1% /tmp
/dev/sdal       477M 244M 204M  55% /boot
tmpfs           393M   0 393M   0% /run/user/1000
[root@jedway2 ~]#
```